



ZEUS LED

ZEU574792

ES-SYSTEM



A luminaire for accent lighting of high building façades and passageways around buildings. Precision multi-lens optics. Luminaire with two-way light distribution. Mounting type: for surface mounting; Mounting location: wall; Luminous flux: 1700lm; Maximum luminous efficacy: 85lm/W; Correlated color temperature: 3000K ; Color rendering index (CRI): >80; Median useful life: L90 - 150000 h; Photobiological risk group: 1; Photobiological risk group: 1; Energy efficiency class: E; Luminous intensity distribution direction: direct; Beam angle: 38°; Luminous intensity distribution: medium; Luminous intensity distribution geometry: symmetrical; Voltage: 230V AC; Power: 20W; Wired lighting control: ON/OFF; IP Code: IP65; IEC protection class: I; Lens material: PMMA; Lens construction: matrix lens system; Housing material: Painted aluminum sheet; Luminaire shape: tubular; Permissible ambient temperature range: from -20°C to 25°C; Corrosivity class: C3; Circuit load capacity (B10): 31; Circuit load capacity (B16): 50; Dimensions: Height: 300mm, Diameter: 140mm ; Weight: 4.50kg; Tilted: No; Mounting height: >3-6 m; Registered design: No; EAN: 5901155747923;

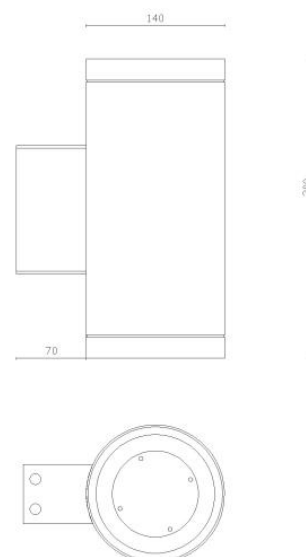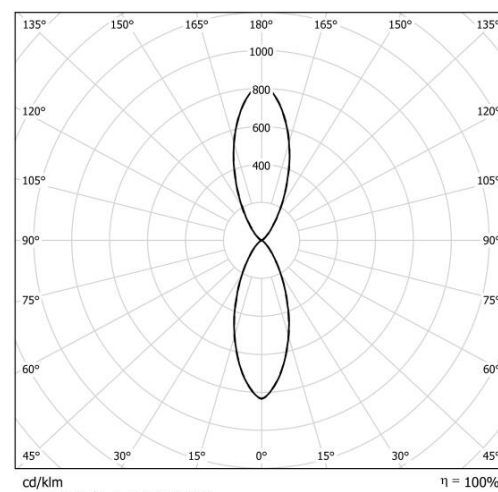

Mounting type	for surface mounting
Mounting location	wall
Luminous flux	1700lm
Maximum luminous efficacy	85lm/W
Correlated color temperature	3000K
Color rendering index (CRI)	>80
Median useful life	L90 - 150000 h
Photobiological risk group	1
Energy efficiency class	E
Luminous intensity distribution direction	direct
Beam angle	38°
Luminous intensity distribution	medium
Luminous intensity distribution geometry	symmetrical
Voltage	230V AC
Power	20W
Wired lighting control	ON/OFF
IP Code	IP65
IEC protection class	I
Lens material	PMMA
Lens construction	matrix lens system
Housing material	Painted aluminum sheet
Luminaire shape	tubular
Permissible ambient temperature range	from -20°C to 25°C
Corrosivity class	C3
Circuit load capacity (B10)	31
Circuit load capacity (B16)	50
Dimensions	Height: 300mm Diameter: 140mm
Weight	4.50kg

Mounting height	>3-6 m
EAN	5901155747923