


KRYPTON LED

5001909

ES-SYSTEM
Light is Life

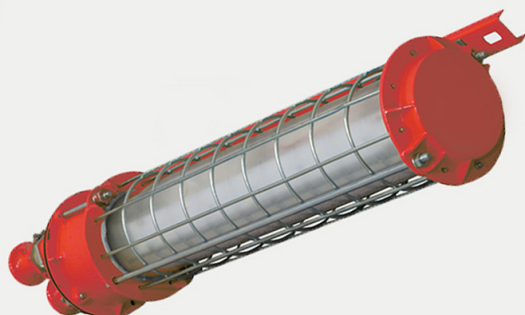

A decorative luminaire with an industrial/mining look. Suitable for wall or pendant mounting. The cylindrical housing and covers are made of die-cast aluminum. The steel grid has a decorative and protective function. The diffuser is made of frosted hardened glass. Stainless steel hex screws. Suitable for through-wiring. The luminaires high ingress protection rating of IP66 makes it suitable for outdoor installation. Mounting type: Surface-mounted, Pendant; Mounting location: ceiling; Luminous flux: 1800lm; Correlated color temperature: 3000K ; Color rendering index (CRI): >80; Standard Deviation of Color Matching (SDCM): SDCM <3; Luminous intensity distribution direction: direct/indirect; Luminous intensity distribution geometry: symmetrical; Unified glare rating (UGR): 19 - 24; Average luminance of 65° and above: <3000; Voltage: 230V AC; Power: 22W; Wired lighting control: ON/OFF; IP Code: IP66; IEC protection class: I; Diffuser material: hardened glass; Diffuser type: frosted; Housing material: die-cast aluminum; Luminaire color: RAL3020; Luminaire shape: tubular; Permissible ambient temperature range: from 0°C to 25°C; Circuit load capacity (B10): 18; Circuit load capacity (B16): 30; Weight: 11.00kg; Energy efficiency class: A; Tilted: No; Registered design: No;

Mounting type	Surface-mounted, Pendant
Mounting location	ceiling
Luminous flux	1800lm
Correlated color temperature	3000K
Color rendering index (CRI)	>80
Standard Deviation of Color Matching (SDCM)	SDCM <3
Luminous intensity distribution direction	direct/indirect
Luminous intensity distribution geometry	symmetrical
Unified glare rating (UGR)	19 - 24
Average luminance of 65° and above	<3000
Voltage	230V AC
Power	22W
Wired lighting control	ON/OFF
IP Code	IP66
IEC protection class	I
Diffuser material	hardened glass
Diffuser type	frosted
Housing material	die-cast aluminum
Luminaire color	RAL3020
Luminaire shape	tubular
Permissible ambient temperature range	from 0°C to 25°C
Circuit load capacity (B10)	18
Circuit load capacity (B16)	30
Weight	11.00kg
Energy efficiency class	A

