



GECO MINI

GK101-20120R9016

ES-SYSTEM



A small, configurable spotlight for interior lighting, with a luminous flux of up to 800 lm. A wide selection of reflectors, lenses, and glare-reducing elements suitable for tool-free replacement even after the housing is assembled, ensuring maximum design and application flexibility. A quick connector between the power supply and the housing allows for the simple replacement of the device. Specular silver reflector. Round outer frame. Luminaire type: Downlights; Mounting type: recessed mounting; Mounting location: ceiling; Luminous flux: 790lm; Luminous efficacy: 79lm/W; Correlated color temperature: 2700K ; Color rendering index (CRI): >80; Median useful life: L70B50 - 231000 h, L80B50 - 145000 h, L90B50 - 69000 h; Photobiological risk group: 1; Photobiological risk group: 1; Luminous intensity distribution direction: direct; Beam angle: 36°; Luminous intensity distribution: medium; Frame color: white, RAL9016; Luminous intensity distribution geometry: symmetrical; Unified glare rating (UGR): 10 - 11; Voltage: 230V AC; Power: 10W; Wired lighting control: ON/OFF; IP Code: IP20; IEC protection class: II; Diffuser material: protective glass; Diffuser type: matte; Reflector material: aluminum; Reflector surface: specular; Lens material: PC; Lens construction: single lens; Optics: a luminaire with a wallwasher option; Housing material: Die-cast aluminum; Luminaire shape: round; Circuit load capacity (B10): 17; Circuit load capacity (B16): 27; Power Supply: Delivered with the luminaire; Dimensions: Height: 101mm, Diameter: 90mm ; Ceiling opening dimensions: 75mm; Weight: 0.40kg; Energy efficiency class: A+; Tilted: No; Registered design: No; EAN: 5901155905712;

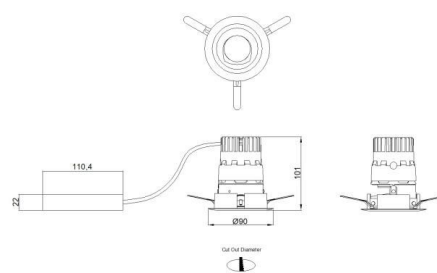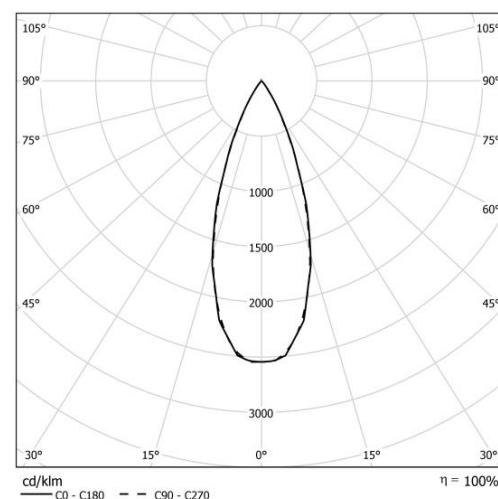

Luminaire type	Downlights
Mounting type	recessed mounting
Mounting location	ceiling
Luminous flux	790lm
Luminous efficacy	79lm/W
Correlated color temperature	2700K
Color rendering index (CRI)	>80
Median useful life	L70B50 - 231000 h L80B50 - 145000 h L90B50 - 69000 h
Photobiological risk group	1
Luminous intensity distribution direction	direct
Beam angle	36°
Luminous intensity distribution	medium
Frame color	white, RAL9016
Luminous intensity distribution geometry	symmetrical
Unified glare rating (UGR)	10 - 11
Voltage	230V AC
Power	10W
Wired lighting control	ON/OFF
IP Code	IP20
IEC protection class	II
Diffuser material	protective glass
Diffuser type	matte
Reflector material	aluminum
Reflector surface	specular
Lens material	PC

Lens construction	single lens
Optics	a luminaire with a wallwasher option
Housing material	Die-cast aluminum
Luminaire shape	round
Circuit load capacity (B10)	17
Circuit load capacity (B16)	27
Power Supply	Delivered with the luminaire
Dimensions	Height: 101mm Diameter: 90mm
Ceiling opening dimensions	75mm
Weight	0.40kg
Energy efficiency class	A+
EAN	5901155905712

Additional accessories

- 9001075 Honeycomb louvre, magnetically attached - GECO MINI
- 9900102 Black reflector, matte, pinhole, white finish, non-tilted - GECO MINI
- 9900105 Black reflector, matte, ribbed, round, non-tilted - GECO MINI
- 9900111 Black reflector, specular, titanium, round, non-tilted - GECO MINI
- 9900117 Gold reflector, matte, round, non-tilted - GECO MINI
- 9900123 White reflector, matte, round, non-tilted - GECO MINI
- 9900145 Black reflector, matte, round, non-tilted - GECO MINI
- 9900151 White reflector, matte, ribbed, round, non-tilted - GECO MINI
- 9900158 Silver reflector, specular, round, non-tilted - GECO MINI