

# GECO MINI



## GK101-20146R9016

ES-SYSTEM



A small, configurable spotlight for interior lighting, with a luminous flux of up to 800 lm. A wide selection of reflectors, lenses, and glare-reducing elements suitable for tool-free replacement even after the housing is assembled, ensuring maximum design and application flexibility. A quick connector between the power supply and the housing allows for the simple replacement of the device. Specular silver reflector. Round outer frame. Luminaire type: Downlights; Mounting type: recessed mounting; Mounting location: ceiling; Luminous flux: 790lm; Luminous efficacy: 79lm/W; Correlated color temperature: 4000K ; Color rendering index (CRI): >80; Median useful life: L70B50 - 231000 h, L80B50 - 145000 h, L90B50 - 69000 h; Photobiological risk group: 1; Photobiological risk group: 1; Luminous intensity distribution direction: direct; Beam angle: 36°; Luminous intensity distribution: medium; Frame color: white, RAL9016; Luminous intensity distribution geometry: symmetrical; Unified glare rating (UGR): 10 - 11; Voltage: 230V AC; Power: 10W; Wired lighting control: DALI; IP Code: IP20; IEC protection class: II; Diffuser material: protective glass; Diffuser type: matte; Reflector material: aluminum; Reflector surface: specular; Lens material: PC; Lens construction: single lens; Optics: a luminaire with a wallwasher option; Housing material: Die-cast aluminum; Luminaire shape: round; Circuit load capacity (B10): 31; Circuit load capacity (B16): 50; Power Supply: Delivered with the luminaire; Dimensions: Height: 101mm, Diameter: 90mm ; Ceiling opening dimensions: 75mm; Weight: 0.40kg; Energy efficiency class: A+; Tilted: No; Registered design: No; EAN: 5901155905750;

<b>Luminaire type</b>	Downlights
<b>Mounting type</b>	recessed mounting
<b>Mounting location</b>	ceiling
<b>Luminous flux</b>	790lm
<b>Luminous efficacy</b>	79lm/W
<b>Correlated color temperature</b>	4000K
<b>Color rendering index (CRI)</b>	>80
<b>Median useful life</b>	L70B50 - 231000 h L80B50 - 145000 h L90B50 - 69000 h
<b>Photobiological risk group</b>	1
<b>Luminous intensity distribution direction</b>	direct
<b>Beam angle</b>	36°
<b>Luminous intensity distribution</b>	medium
<b>Frame color</b>	white, RAL9016
<b>Luminous intensity distribution geometry</b>	symmetrical
<b>Unified glare rating (UGR)</b>	10 - 11
<b>Voltage</b>	230V AC
<b>Power</b>	10W
<b>Wired lighting control</b>	DALI
<b>IP Code</b>	IP20
<b>IEC protection class</b>	II
<b>Diffuser material</b>	protective glass
<b>Diffuser type</b>	matte
<b>Reflector material</b>	aluminum
<b>Reflector surface</b>	specular
<b>Lens material</b>	PC

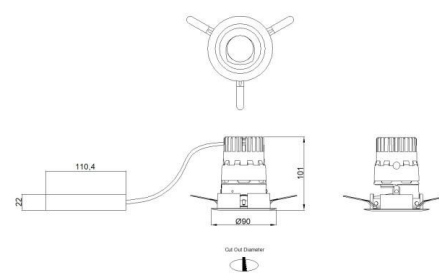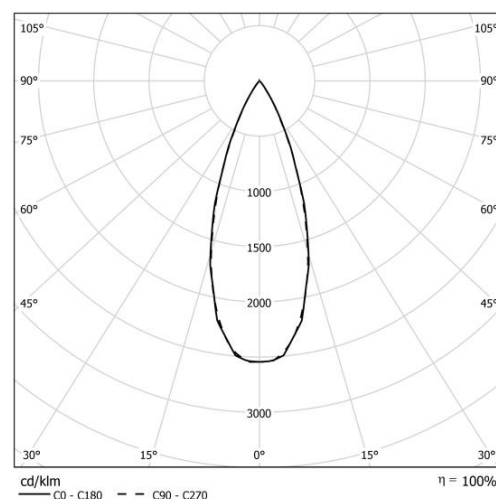

<b>Lens construction</b>	single lens
<b>Optics</b>	a luminaire with a wallwasher option
<b>Housing material</b>	Die-cast aluminum
<b>Luminaire shape</b>	round
<b>Circuit load capacity (B10)</b>	31
<b>Circuit load capacity (B16)</b>	50
<b>Power Supply</b>	Delivered with the luminaire
<b>Dimensions</b>	Height: 101mm Diameter: 90mm
<b>Ceiling opening dimensions</b>	75mm
<b>Weight</b>	0.40kg
<b>Energy efficiency class</b>	A+
<b>EAN</b>	5901155905750

#### Additional accessories

- 9001075 Honeycomb louvre, magnetically attached - GECCO MINI
- N000074 RAPTOR DT6 controller