

REGLUX



5857060

ES-SYSTEM



A lightweight and efficient luminaire with a streamlined shape and an increased ingress protection rating of IP44. The ribbed, frosted diffuser reduces glare and evenly diffuses light. Pressure molded covers made of white plastic. The screw-on cover protects against unauthorized access to the inside of the luminaire. Luminaire type: Linear luminaires, Increased ingress protection; Mounting type: for surface mounting; Mounting location: ceiling; Luminous flux: 7400lm; Luminous efficacy: 123lm/W; Correlated color temperature: 3000K ; Color rendering index (CRI): >80; Median useful life: L70B50 - 170000 h,L80B50 - 107000 h,L90B50 - 51000 h; Photobiological risk group: ; Photobiological risk group: 0; Luminous intensity distribution direction: direct; Beam angle: 128°; Luminous intensity distribution: very wide; Frame color: white, smooth matte, RAL9016; Luminous intensity distribution geometry: symmetrical; Voltage: 230V AC; Power: 60W; Wired lighting control: DALI; IP Code: IP44; IK Code: IK06; IEC protection class: I; Diffuser material: PMMA; Diffuser type: ribbed, structured; Reflector material: steel sheet; Reflector surface: painted; Housing material: steel sheet; Luminaire shape: rectangular; Permissible ambient temperature range: from 0°C to 25°C; Circuit load capacity (B10): 13; Circuit load capacity (B16): 24; Dimensions: Height: 51mm, Width: 175mm, Length: 1040mm, ; Weight: 2.20kg; Energy efficiency class: A+; Tilted: No; Registered design: No; EAN: 5901155649517;

Luminaire type	Linear luminaires, Increased ingress protection
Mounting type	for surface mounting
Mounting location	ceiling
Luminous flux	7400lm
Luminous efficacy	123lm/W
Correlated color temperature	3000K
Color rendering index (CRI)	>80
Median useful life	L70B50 - 170000 h L80B50 - 107000 h L90B50 - 51000 h
Photobiological risk group	0
Luminous intensity distribution direction	direct
Beam angle	128°
Luminous intensity distribution	very wide
Frame color	white, smooth matte, RAL9016
Luminous intensity distribution geometry	symmetrical
Voltage	230V AC
Power	60W
Wired lighting control	DALI
IP Code	IP44
IK Code	IK06
IEC protection class	I
Diffuser material	PMMA
Diffuser type	ribbed, structured
Reflector material	steel sheet
Reflector surface	painted
Housing material	steel sheet
Luminaire shape	rectangular
Permissible ambient temperature range	from 0°C to 25°C

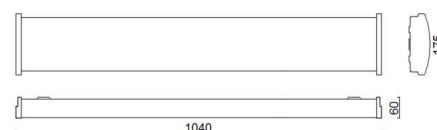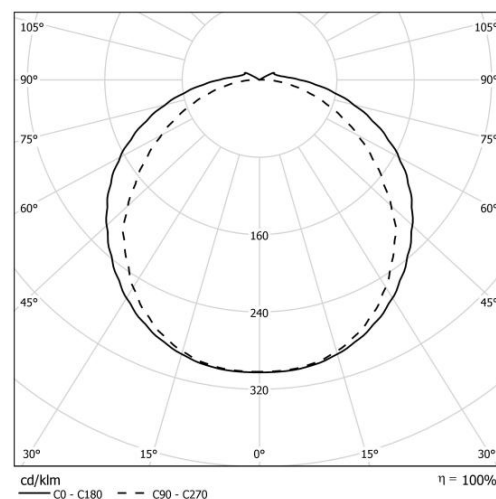

Circuit load capacity (B10)	13
Circuit load capacity (B16)	24
Dimensions	Height: 51mm Width: 175mm Length: 1040mm
Weight	2.20kg
Energy efficiency class	A+
EAN	5901155649517