


# FX45 OP


## F0430-00140RANODL2020CB00

**ES-SYSTEM**  
Light is Life

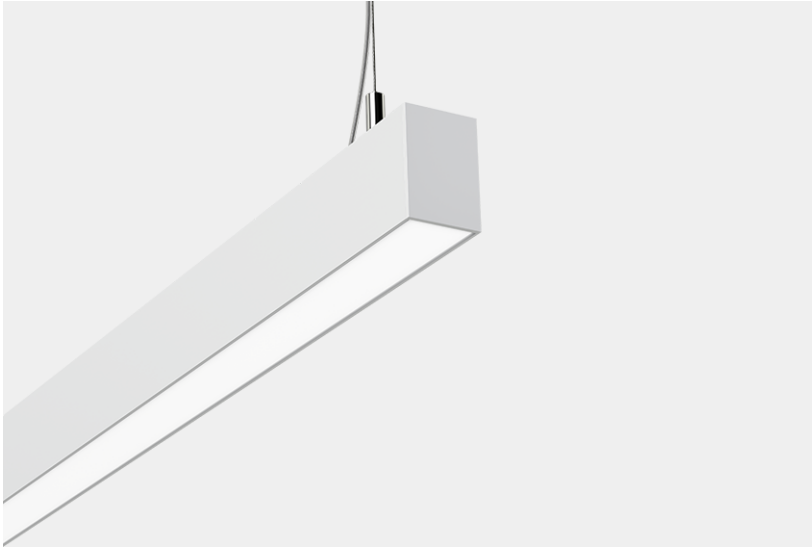

Universal and timeless. The opal PC diffuser is installed using the CLICK system. The inner white aluminum reflector increases the system's efficiency. The housing is made of smooth extruded aluminum profile, with a die-cast aluminum cover with no visible screws. Smooth suspension wire spacing adjustment. Luminaire type: Profiles and structures; Mounting type: pendant, for surface mounting; Mounting location: ceiling; Luminous flux: 4000lm; Luminous efficacy: 111lm/W; Correlated color temperature: 4000K ; Color rendering index (CRI): >80; Practical emergency lamp flux (PELF): 3800lm; Luminous intensity distribution direction: direct; Beam angle: 107° x 109°; Frame color: aluminum, anodized; Luminous intensity distribution: very wide; Luminous intensity distribution geometry: symmetrical; Voltage: 230V AC/DC; Power: 36W; Wired lighting control: ON/OFF; IP Code: IP20; IEC protection class: I; Diffuser material: PC; Diffuser type: opal; Reflector material: aluminum; Reflector surface: white; Housing material: Anodized aluminum profile; Luminaire shape: rectangular; Permissible ambient temperature range: from 0°C to 25°C; Circuit load capacity (B10): 10; Circuit load capacity (B16): 16; Dimensions: Height: 65mm, Width: 44mm, Length: 2020mm, ; Weight: 3.30kg; Energy efficiency class: A+; Tilted: No; Registered design: No;

<b>Luminaire type</b>	Profiles and structures
<b>Mounting type</b>	pendant, for surface mounting
<b>Mounting location</b>	ceiling
<b>Luminous flux</b>	4000lm
<b>Luminous efficacy</b>	111lm/W
<b>Correlated color temperature</b>	4000K
<b>Color rendering index (CRI)</b>	>80
<b>Practical emergency lamp flux (PELF)</b>	3800lm
<b>Luminous intensity distribution direction</b>	direct
<b>Beam angle</b>	107° x 109°
<b>Frame color</b>	aluminum, anodized
<b>Luminous intensity distribution</b>	very wide
<b>Luminous intensity distribution geometry</b>	symmetrical
<b>Voltage</b>	230V AC/DC
<b>Power</b>	36W
<b>Wired lighting control</b>	ON/OFF
<b>IP Code</b>	IP20
<b>IEC protection class</b>	I
<b>Diffuser material</b>	PC
<b>Diffuser type</b>	opal
<b>Reflector material</b>	aluminum
<b>Reflector surface</b>	white
<b>Housing material</b>	Anodized aluminum profile
<b>Luminaire shape</b>	rectangular
<b>Permissible ambient temperature range</b>	from 0°C to 25°C

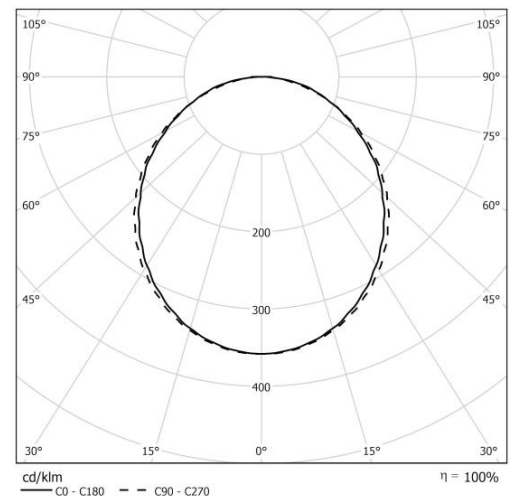

<b>Circuit load capacity (B10)</b>	10
<b>Circuit load capacity (B16)</b>	16
<b>Dimensions</b>	Height: 65mm
	Width: 44mm
	Length: 2020mm
<b>Weight</b>	3.30kg
<b>Energy efficiency class</b>	A+

Additional accessories



Suspension wire, L = 1.5 m



Suspension wire with a loop, L = 1.5 m

Round ceiling box without any visible screws, gray

Rectangular ceiling box, FX45 profile, gray

Suspension bracket FX35 / FX45

Bracket for surface mounting on ceilings for FX35/FX45