


PAVO

5064054

ES-SYSTEM

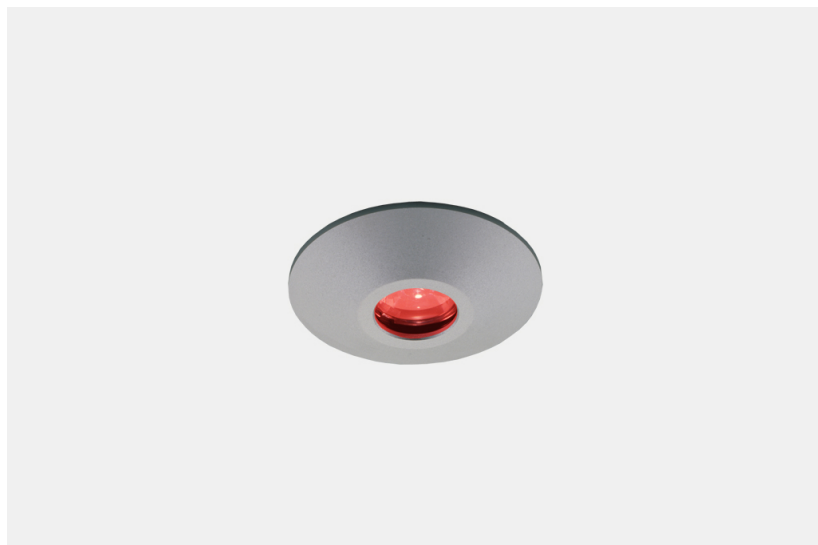

A compact ceiling-recessed luminaire for lighting and illuminations of passages and building façades. Its small size allows for subtly highlighting the building's architecture. Luminaire with red light. Mounting type: recessed mounting; Mounting location: ceiling; Luminous efficacy: 0lm/W; LED color: 625 ; Photobiological risk group: ; Photobiological risk group: 0; Luminous intensity distribution direction: direct; Luminous intensity distribution geometry: symmetrical; Voltage: 230V AC; Power: 2W; Wired lighting control: ON/OFF; IP Code: IP65; IEC protection class: II; Lens material: PC; Lens construction: single lens; Housing material: Painted aluminum sheet; Luminaire shape: round; Permissible ambient temperature range: from -25°C to 25°C; Corrosivity class: C3; Circuit load capacity (B10): 18; Circuit load capacity (B16): 30; Dimensions: Height: 80mm, Diameter: 55mm ; Ceiling opening dimensions: 50mm; Weight: 0.20kg; Tilted: No; Registered design: No; EAN: 5901155055851;

Mounting type	recessed mounting
Mounting location	ceiling
Luminous efficacy	0lm/W
LED color	625
Photobiological risk group	0
Luminous intensity distribution direction	direct
Luminous intensity distribution geometry	symmetrical
Voltage	230V AC
Power	2W
Wired lighting control	ON/OFF
IP Code	IP65
IEC protection class	II
Lens material	PC
Lens construction	single lens
Housing material	Painted aluminum sheet
Luminaire shape	round
Permissible ambient temperature range	from -25°C to 25°C
Corrosivity class	C3
Circuit load capacity (B10)	18
Circuit load capacity (B16)	30
Dimensions	Height: 80mm Diameter: 55mm
Ceiling opening dimensions	50mm
Weight	0.20kg
EAN	5901155055851

