



DELTA LED

5596511

ES-SYSTEM



A floodlight designed for the illumination and lighting of parking facilities, sports fields and industrial facilities. Luminaire without an external heat sink. Mounting type: special; Mounting location: wall, extension arm; Luminous flux: 5200lm; Luminous efficacy: 104lm/W; Correlated color temperature: 3000K ; Color rendering index (CRI): >80; Median useful life: L70B50 - 176000 h, L80B50 - 111000 h, L90B50 - 53000 h; Photobiological risk group: ; Photobiological risk group: 0; Luminous intensity distribution direction: direct; Luminous intensity distribution geometry: symmetrical; Voltage: 230V AC; Power: 50W; Wired lighting control: ON/OFF; IP Code: IP65; IK Code: IK09; IEC protection class: I; Housing material: Die-cast aluminum; Luminaire shape: rectangular; Permissible ambient temperature range: from -20°C to 25°C; Corrosivity class: C3; Circuit load capacity (B10): 8; Circuit load capacity (B16): 13; Dimensions: Height: 123mm, Width: 266mm, Length: 360mm, ; Weight: 5.50kg; Energy efficiency class: A+; Tilted: No; Mounting height: >6-12 m; Registered design: No; EAN: 5901155628468;

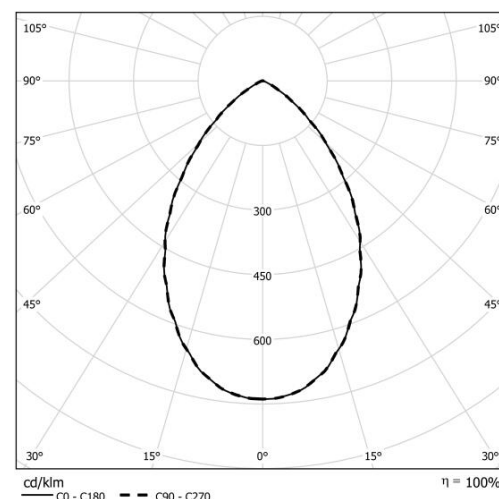

Mounting type	special
Mounting location	wall, extension arm
Luminous flux	5200lm
Luminous efficacy	104lm/W
Correlated color temperature	3000K
Color rendering index (CRI)	>80
Median useful life	L70B50 - 176000 h L80B50 - 111000 h L90B50 - 53000 h
Photobiological risk group	0
Luminous intensity distribution direction	direct
Luminous intensity distribution geometry	symmetrical
Voltage	230V AC
Power	50W
Wired lighting control	ON/OFF
IP Code	IP65
IK Code	IK09
IEC protection class	I
Housing material	Die-cast aluminum
Luminaire shape	rectangular
Permissible ambient temperature range	from -20°C to 25°C
Corrosivity class	C3
Circuit load capacity (B10)	8
Circuit load capacity (B16)	13
Dimensions	Height: 123mm Width: 266mm Length: 360mm
Weight	5.50kg
Energy efficiency class	A+

Mounting height	>6-12 m
EAN	5901155628468