


MONITOR1 IP40 LED MON544279

ES-SYSTEM



A one-sided wall-mounted luminaire for emergency safety sign lighting in accordance with the standards: EN 1838, EN 50172, escape route emergency lighting in accordance with the EN 60598-2-22 standard, for use with escape signs in accordance with ISO 7010. The optics have been optimized to ensure uniform pictogram illumination. Luminaire type: Self-contained emergency exit luminaires; Emergency lighting control system: STI; Duration time: 3h; Battery technology: NiMH; Operating mode: TC; Standard Deviation of Color Matching (SDCM): SDCM <3; Color rendering index (CRI): >70; Voltage: 230V AC; Power in non-maintained mode: 1.20W; IEC protection class: II; Diffuser material: PC; Diffuser type: frosted; Wired lighting control: BM; Housing material: PC; Luminaire shape: rectangular; Dimensions: Height: 42mm, Width: 140mm, Length: 340mm, ; Permissible ambient temperature range: from 0°C to 40°C; Operating temperature: 25°C; Weight: 0.95kg; Mounting height: <=3 m; Median useful life: L70 - 81000 h, L80 - 51000 h, L90 - 25000 h;

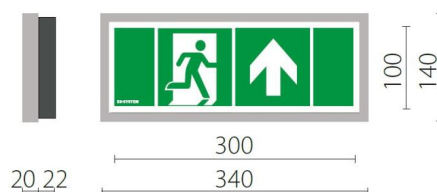

Luminaire type	Self-contained emergency exit luminaires
Emergency lighting control system	STI
Duration time	3h
Battery technology	NiMH
Operating mode	TC
Standard Deviation of Color Matching (SDCM)	SDCM <3
Color rendering index (CRI)	>70
Voltage	230V AC
Power in non-maintained mode	1.20W
IEC protection class	II
Diffuser material	PC
Diffuser type	frosted
Wired lighting control	BM
Housing material	PC
Luminaire shape	rectangular
Dimensions	Height: 42mm Width: 140mm Length: 340mm
Permissible ambient temperature range	from 0°C to 40°C
Operating temperature	25°C
Weight	0.95kg
Mounting height	<=3 m
Median useful life	L70 - 81000 h L80 - 51000 h L90 - 25000 h

Additional accessories



PAC570031	Pictogram: 100x300 (111x311). UP/LEFT + DOOR	Download CAD
PAC570032	Pictogram: 100x300 (111x311). DOOR + UP/RIGHT	Download CAD
PAC570033	Pictogram: 100x300 (111x311). DOWN/LEFT + DOOR	Download CAD
PAC570034	Pictogram: 100x300 (111x311). DOOR + DOWN/RIGHT	Download CAD
PAC570035	Pictogram: 100x300 (111x311). LEFT + DOOR	Download CAD
PAC570036	Pictogram: 100x300 (111x311). DOOR + RIGHT	Download CAD
PAC570037	Pictogram: 100x300 (111x311). DOWN + DOOR	Download CAD
PAC570038	Pictogram: 100x300 (111x311). DOOR + DOWN	Download CAD
PAC570039	Pictogram: 100x300 (111x311). UP + DOOR	Download CAD
PAC570040	Pictogram: 100x300 (111x311). DOOR + UP	Download CAD
PAC572011	Pictogram: 100x300 (111x311). DOOR + "WYJŚCIE EWAKUACYJNE"	
PAC572159	Pictogram: 100x300 (111x311). "WYJŚCIE EWAKUACYJNE" + DOOR	
PAC106806	Pictogram: 100x300 (111x311). DOWN + HYDRANT	
9849431	Pictogram: 100x300 (111x311). DOWN + FIRE ALARM	
PAC106808	Pictogram: 100x300 (111x311). DOWN + FIRE EXTINGUISHER	
PAC106809	Pictogram: 100x300 (111x311). HYDRANT	
PAC106810	Pictogram: 100x300 (111x311). FIRE ALARM + DOWN	
9849471	Pictogram: 100x300 (111x311). FIRE EXTINGUISHER	
PAC514798	Flush box	
PAC556331	Ceiling box for recessed mounting in ceilings	
PAC514799	Wire guard	
PAC520502	Adjustable bracket	